quick start

smart alert™ system

Hear your home

unitron™

Staying aware has never been so simple

Thank you for choosing Smart Alert™ System. You've made a great choice. The Smart Alert System provides you with independence and peace of mind around your home, around the clock – even when you're sleeping. It's the only fully integrated all-in-one hearing and alerting system that brings together your household alerts with your hearing solution, so you'll always be aware of important household signals – phones, doorbells, smoke detectors and more.

This guide will help you set up and use your system so you can start enjoying the benefits today.

For a step-by-step visual guide to getting your Smart Alert System installed quickly and easily, visit www.unitron.com/smartalert

What's in the box?

SMART ALERT REMOTE

NIGHTSTAND CHARGER

TELEPHONE DETECTOR

DOORBELL DETECTOR

BED SHAKER

SMOKE DETECTOR

Note:
Only available with the Safety Awareness package

Getting started

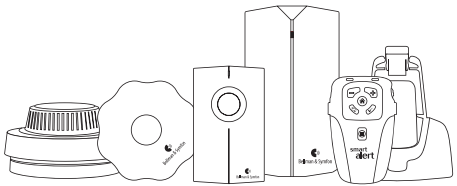

Step 1
Remove all components from box.



Step 2
Install supplied batteries in detectors. Open battery cover of each detector, and insert batteries +/- as indicated. Close battery cover.

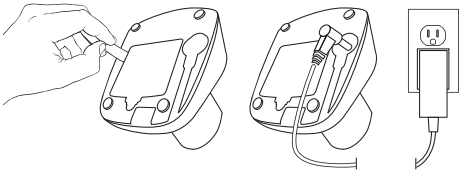

Step 3
Plug nightstand charger into power supply outlet near your bed. Pull tab at bottom of charger to activate.

Quick and easy! Set up your Smart Alert™ System around your home.

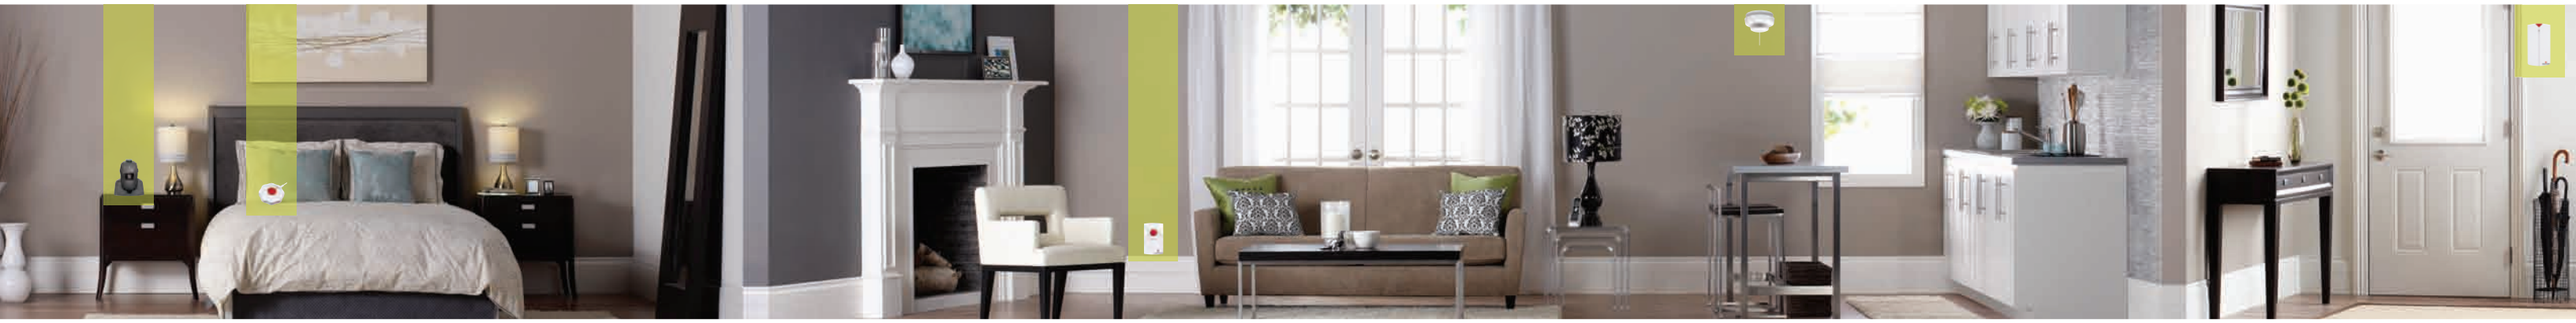

Bed shaker

Each evening, place the remote in the charger cradle to ensure bed shaker is activated if a detector sounds.



Step 1 – Install
Connect the bed shaker to the nightstand charger using the supplied connector.

Step 2 – Test
Place the remote in charger. Press test button on any of the detectors, and check that bed shaker vibrates.



Step 3 – Finish
Press acknowledge button on remote to stop test alert.

TIP

Check all batteries every six months.

Occasionally press test button on each of the detectors to see if batteries are still operational.

Telephone detector



Step 1 – Connect
Connect telephone cable to telephone connector. Insert adaptor plug into telephone socket.



Step 2 – Install
Position detector unit on wall or any level surface near telephone socket. Use supplied wall mount bracket or self-adhesive velcro tape to adhere detector to wall, after cleaning wall with supplied wet wipe. Do not place detector on floor.



Step 3 – Test
Press test button on the detector. The LED light on telephone detector will illuminate, as will the yellow LED telephone icon on remote, which will also vibrate. A beep alert will sound in your hearing instruments.



Step 4 – Finish
Press acknowledge button on remote to stop test alert.

Smoke detector

(omit steps with Awareness Package)



Step 1 – Install
Remove mounting bracket from smoke detector.

Attach supplied mounting bracket at least 20 in/50 cm from any wall next to existing smoke detector or where a smoke detector would be optimally located in your home.

Re-attach smoke detector to the wall mount bracket.

Fully extend antenna away from the smoke detector.

Step 2 – Test
Hold down test button on the detector. After several seconds, smoke detector will sound a shrill alarm and transmit a signal to remote. The red LED smoke icon will illuminate on remote, which will also vibrate. The urgent beep alert will sound in your hearing instruments.



Step 3 – Finish
Press acknowledge button on remote to stop test alert – see note below for details on urgent alerts.

IMPORTANT NOTE! *For urgent alerts from the smoke detector, beeping, vibration and LED icon on remote can be stopped only by addressing cause of smoke alarm. When testing the smoke detector, pressing the acknowledge button will stop the beeping; the vibration and LED continue for 30 seconds.*

Doorbell detector

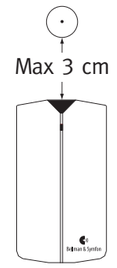

Step 1 – Install
Position detector unit on wall with red triangle no more than 1.5 in/3 cm from doorbell's sound source. Use supplied hardware or self-adhesive velcro tape to adhere detector to wall, after cleaning wall with supplied wet wipe.



Step 2 – Test
Press test button on the detector. The LED light on doorbell detector will illuminate, as will the green LED doorbell icon on remote, which will also vibrate. A beep alert will sound in your hearing instruments.



Step 3 – Finish
Press acknowledge button on remote to stop test alert.

You are now ready to use your Smart Alert™ System in your home!

Smart Alert System includes everything
you need to stay safe and aware, day and night:
household detectors; Smart Alert remote;
nightstand charger; and bed shaker.

smart alert™ system

Hear your home

powered by
Bellman & Symfon

At Unitron, we care deeply about people with hearing loss.
We work closely with hearing healthcare professionals to make
advanced, purpose-driven solutions available to everyone.

www.unitron.com/smartalert

09-061 028-5446-02

unitron™